

IRC series

CSS-DCN


4-pin, Interface solid state relay, 1-pole, plug-in faston

Type	CSS-DCN NPN solid state relay For switching inductive ohmic DC loads Negative common output
Output	1 N/O contact
Operating range	2 A, 5 ... 50 VDC
Minimum contact load	1 mA
Control parameters	
Input voltage range	5 ... 32 VDC
Release voltage	< 2,5 VDC
Input current	3 ± 1 mA
Stabilised current regulator	yes
Input voltage protection	IEC-1000-4-5 Level 1
Output	
Type	NPN
Max. output current	2 A
Output voltage range	5 ... 50 VDC
Switch-on current max.	5 A/ 350µs
Max. switch-on current	≤ 1,3 VDC
Residual current	< 100 µA/48 VDC
EMC protection	IEC-1000-4-5 Level 1
Inverse current	≤ 1 A
Specifications	
Ambient temperature operation/storage	-25 ... 60 °C/-40 ... 80 °C
Test voltage between input/output	4 kV rms/1 min.
Turn-on delay	1 ms
Release delay	≤ 2 ms
Weight	28 g

Applications

For switching heating elements, electro valves, motors, PLC input/output signals, solenoids, incandescent and fluorescent lamps, etc. (up to 50 VDC).

Inductive loads must be shunted with an antiparallel diode.




Accessories


Socket: **S10, S10-M, S10-K, S10-P**




Fig. 1 CSS-DCN diagram Negative Common

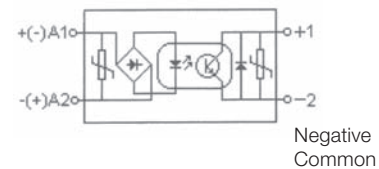

Tab. 2 DC load limit curve

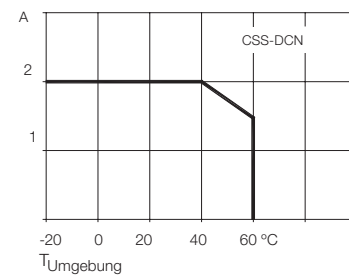

Dimensions [mm]

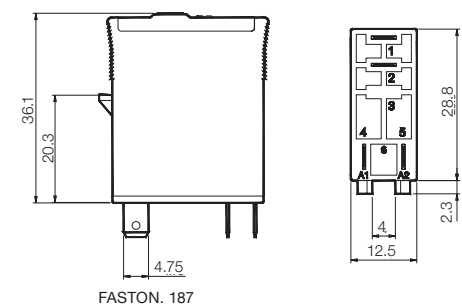

Technical approvals, conformities

