


**MRC series**  
**S5-L, S5-P, S5-PO**  
**Socket for soldering and printed circuit for relays C5-...**


<b>Type</b>	<b>S5-L</b> 3-pole, flange panel mountable
	<b>S5-P</b> 3-pole, printed circuit
	<b>S5-PO</b> 3-pole, printed circuit with flange
<b>Rated current</b>	<b>16 A</b>
<b>Specifications</b>	
Rated load	16 A/400 V
Ambient temperature operation/storage	-40 (no ice)...60 °C / -40 ... 80 °C
<b>Accessories</b>	
Retaining spring, steel	<b>S5-C</b>



**Printed circuit lay-out [mm]**



**Dimensions [mm]**

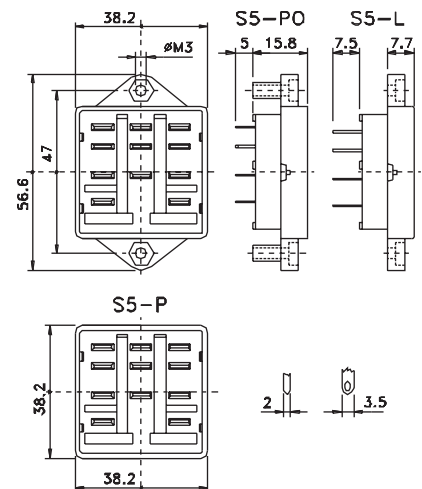

**Technical approvals, conformities**

